

Technical data sheet for

AL

Premium Passthrough Dishwasher

W 750mm x D 795mm x H 1530mm



With the fastest complete cycle time of 40 seconds, the AL delivers unrivalled single tank passthrough dishwasher performance and capacity, washing up to 1400 large plates per hour.

Standard Features

- Stainless steel arms with removable end caps for cleaning
- 430mm high wash chamber clearance
- Robust stainless steel construction
- Electromechanical controls
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Watermark certified
- 2.6 litres per cycle water consumption
- Up to 1400 plates per hour
- 1.5kW wash pump recirculates wash water at nominal 800 litres per minute through double upper and lower wash arms
- 5kW rinse and 2.5kW wash heating
- High speed 40, 60 and 90 second cycles for varying soil levels
- Double filtration via scrap trays and separate wash inlet filter
- L-shaped tank with curved corners
- Suits 500mm international standard racks
- Fits 700mm deep bench for in-line installation - 750mm in corner application
- Insulated door option available on request


Accessories

- 2 x 500mm Dish Racks
- 1 x 500mm Cup Rack
- 1 x 8 Division Cutlery Container



WASHTECH[®]
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech pass-through dishwasher with Watermark certification, suitable for in-line or corner installation. The unit shall have automatic fill and low level wash pump and element protection and start automatically on door closure. It shall be fitted with operator selectable 40, 60 and 90 second complete operating cycles. Door clearance shall be 430mm. The unit shall be fitted with double rotating upper and lower all stainless steel wash arms and separate single upper and lower rinse arms, all with removable end plugs for cleaning. The unit shall be fitted with a 1.5kW wash pump and hot water consumption shall be 2.6 litres per operating cycle. The unit shall require 1.5amp 3 phase 5 wire electrical supply. The unit shall be supplied with 500mm cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg option in use.

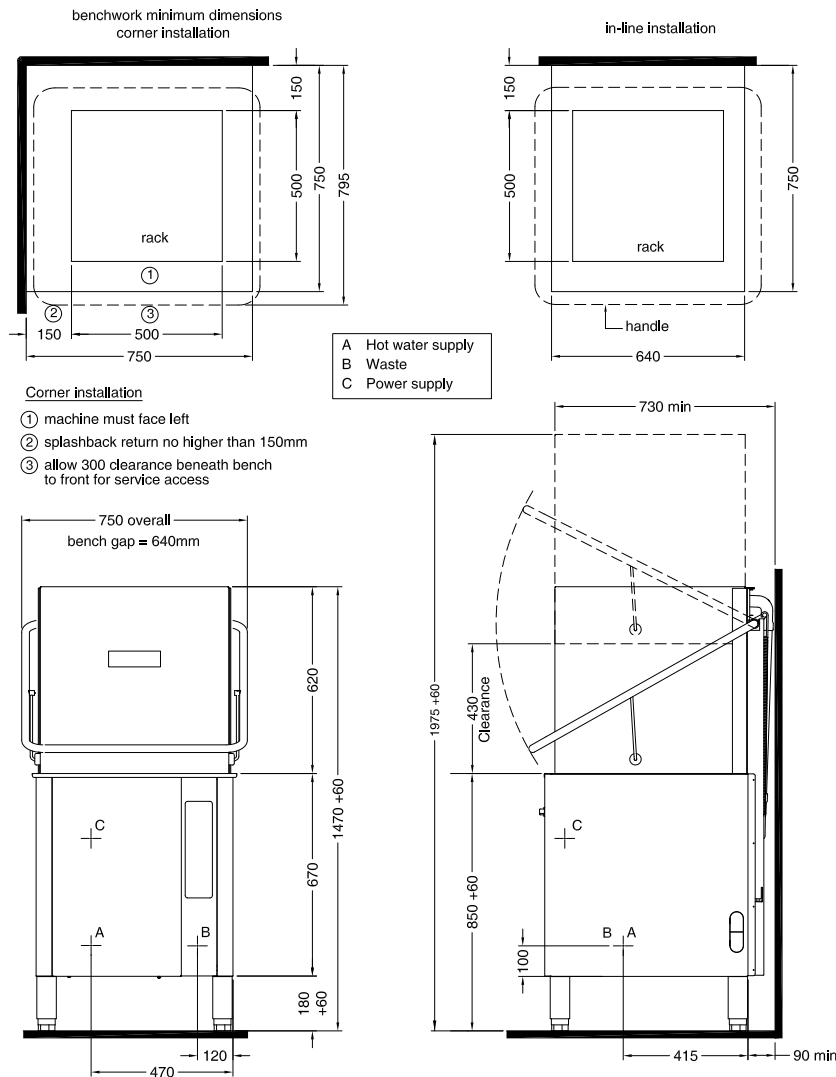

A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 20 litres per min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	3 phase 400-415V 50Hz	15 amp

Refer operator manual for complete installation instructions.

Dimensions

Width	750mm
Depth	795mm
Height	1530mm
Weight	120kg

Packed Dimensions

Width	800mm
Depth	950mm
Height	1475mm
Weight	141kg
Cubicmetres	1.1m ³



Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



© Copyright Moffat Ltd
Moffat /1175/810

