

Technical data sheet for

GM

Premium Glasswasher and Light Duty Dishwasher

W 500mm x D 555mm x H 860mm



This high efficiency, high performance multi-cycle machine is suitable for busy bars and coffee shops.

Standard Features

- 2 litres per cycle hot water consumption
- Up to 1000 glasses per hour
- Upper and lower wash – also suitable for coffee cups, saucers, lightly soiled dishes
- Upper and lower rinse
- Low hot water consumption
- Recirculates wash water at nominal 100 litres per minute
- 3kW rinse and 2.5kW wash heating
- Unique OneTouch 1, 2 or 3 minute cycles
- Selectable cold rinse option
- Automatic detergent dosing
- 290mm wash chamber height clearance
- Suits all racks up to 435mm x 435mm
- Fits 600mm bench depth
- Watermark certified
- Flush front
- Robust stainless construction
- Electromechanical controls
- Removable rack slide
- 150mm legs supplied
- Water supply hoses included
- No commissioning required


Accessories

- 1 x 435mm Glass/Cup Rack
- 1 x Dish Holder
- 1 x Cutlery Container
- 2 x Water supply hoses



WASHTECH[®]
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech glasswasher with Watermark certification. The glasswasher shall have OneTouch multi-cycle upper mounted controls with one, two and three minute complete operating cycles including operator selectable cold final rinse. The unit shall accept all racks up to 435mm square with 290mm door clearance for tall glasses. The unit shall have upper and lower wash and rinse jets and hot water consumption of 2 litres per cycle. A detergent injector shall be fitted and the unit shall be supplied in 100% recyclable shipping packaging. Electrical supply to be 15 amp single phase.

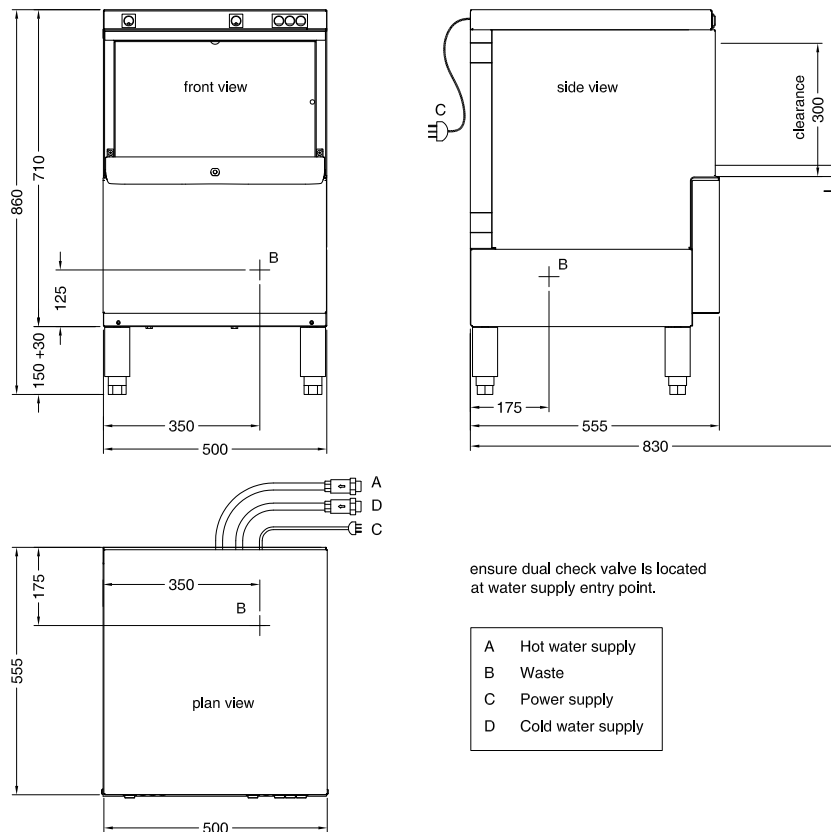

ensure dual check valve is located at water supply entry point.

- A Hot water supply
- B Waste
- C Power supply
- D Cold water supply

| | | | |
|---|-------------------|--|---|
| A | Hot Water | temperature connection pressure flow quality | 65C 3/4" 200-350 kPa 20 litres per min potable & soft |
| B | Waste | connection line | 1.5 BSP 2" BSP |
| C | Electrical | single phase 240V 50Hz | 15 amp |
| D | Cold Water | cold - otherwise as per hot | |

Refer operator manual for complete installation instructions.

| Dimensions | | Packed Dimensions | |
|------------|-------|-------------------|--------------------|
| Width | 500mm | Width | 590mm |
| Depth | 555mm | Depth | 650mm |
| Height | 860mm | Height | 870mm |
| Weight | 68kg | Weight | 84kg |
| | | Cubicmetres | 0.35m ³ |



Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



© Copyright Moffat Ltd
Moffat /1175/8.10

