

TECHNICAL DATA SHEET FOR  
**Convotherm OES 6.06 mini mobile**  
 6 x 2/3 GN Tray Electric Combination Oven Steamers

**General features:**

- Advanced Closed System - automatic moisture regulation, energy-efficient
- Press&Go - easy to use for perfect results
- Requires minimum space - fits anywhere, saving expensive floor space
- Multi-purpose engaging frame - flexible use, various GN sizes
- Fume reducer - minimal steam in the kitchen
- 3-phase/alternating current - select when installing

**Standard features:**

- Crisp&Tasty (multi-level demisting)
- Multi-point core temperature sensor
- Double glass doors with integrated door lock position and self-emptying condensate drip tray (door drip tray)
- Tray Timer (time-delayed loading for each level)
- Menus and icons make the appliance easy to operate
- Bright graphic interface with full-text display
- Digital dial for easy adjustment of temperature, time and core temperature
- Preselect start time in real-time mode
- Programme up to 250 recipes with up to 20 steps each
- CONVOTHERM Cookbook with pre-programmed recipes
- Cook & Hold and Delta-T cooking
- RS 232 interface
- Stores all device settings and recipes in an additional memory module (ID module)
- Robust stainless steel design
- Zero-wear door contact switch
- Removable engaging frame and suction plate
- Hygienic plug-in gasket
- Condensate drip tray on appliance
- Oven light with shockproof glass cover
- Perpetual self-diagnosis for error recognition
- Emergency programme mode: Appliance can be operated with restricted functionality even when technical malfunctions arise
- Detailed documentation, spare parts lists and circuit diagrams
- IPX 4 spray guard
- Rotary lever door lock with slam function
- Hand shower
- Injector version

**Optional features:**

- EasyToUCH operating panel with touch screen display
- HACCPViewer - including USB stick for exporting data
- easyRecipe - including USB stick for exporting data
- Left-hinged version
- Special voltage levels
- ConvoClean Automatic Cleaning System



**Cooking programmes**

- Steaming at 30°C-120°C**  
 - For steaming, stewing and poaching.
- Superheated steam 100°C-250°C**  
 - For roasting and baking.
- Convection 30°C-250°C**  
 - For grilling, quick roasting, baking, toasting and gratinating.
- Regeneration 120°-160°C**  
 - For fast heating of prepared dishes pre-arranged on the plate or platter.



**Optional Accessories**

- Oven stand
- Baking sheets / pans



# TECHNICAL DATA SHEET FOR Convotherm OES 6.06 mini mobile

## 6 x 2/3 GN Tray Electric Combination Oven Steamers

### Dimensions

Width (mm)	515
Depth (mm)	599
Height (mm)	732
Weight (kg)	50

### Packed Dimensions

Width (mm)	580
Depth (mm)	730
Height (mm)	970
Weight (kg)	68

### Shelves

- 6 x 2/3 GN 40 mm deep
- 6 x 2/3 GN 20 mm deep

### Installation conditions

- Appliance must be installed on the level
- Do not install the appliance near, above or below a source of heat or near flammable surfaces

### Installation clearances

- Left/right (mm) 50
- Rear (mm) 50
- Top (mm) 500 (for ventilation)


### Electrical connection

Choose from 230-240V ~ 50/60Hz 1P+N+E or 400-415V ~ 50/60Hz 3P+N+E (can be selected on site)

	1P+N+E
	230V
Connected load (kW)	3.0
Rated current (A)	13.1
Connection cross-section*(mm <sup>2</sup> )	3.0 x 2.5

\* recommended cross-section for uncovered connection with max. length of 5m.

- Fit main switch (all-pin-circuit-breaker) on site, in close proximity to the appliance.
- Connection for potential compensation.

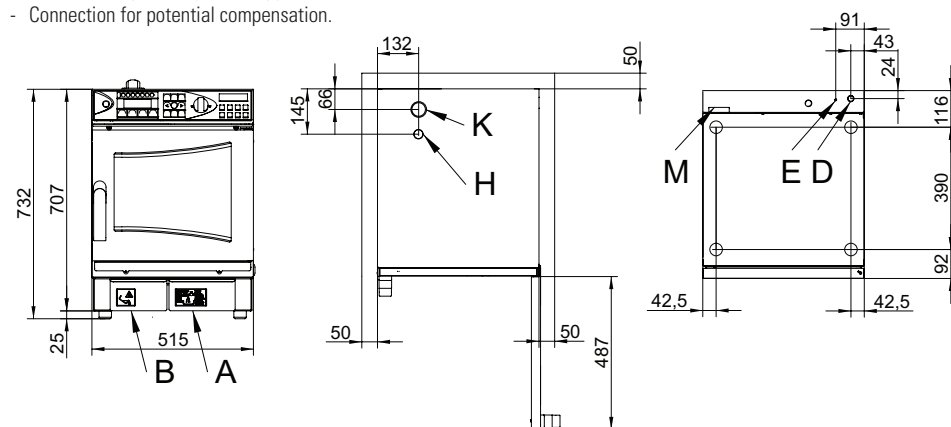

- A = Drinking water drawer
- B = Waste water drawer
- D = Electrical connection
- E = Equipotential bonding
- H = Air bleed tube
- K = Ventilation pipe

### Water Drawer

- Capacity to hold 5.5l
- Water: Drinking water quality with:

Overall hardness:	70-125 ppm
pH:	6.5 - 8.5
Conductivity:	20-200 µS/cm
Cl <sup>-</sup> :	max 100 mg/l
SO <sub>4</sub> <sup>2-</sup> :	max 150 mg/l
Fe:	max 0.1 mg/l
Mn:	max 0.05 mg/l
Cu:	max 0.05 mg/l

Cl<sub>2</sub>: max 0.1 mg/l

### Waste water drawer

- Maximum capacity 4.5l

### Venting and ventilation

Sensible heat:	1100 KJ/h
Latent heat:	100 KJ/h

### The appliance is intended for professional use only

Spray guard:	IPX4
Quality mark:	TÜV GS
Noise emission:	< 60 dBA
GN 2/3 shelves:	6
Shelf spacing:	50mm variable



Australia  
www.moffat.com.au

New Zealand  
www.moffat.co.nz

### Australia Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9202 6820  
bgarcia@moffat.com.au

### New Zealand Moffat Limited

Christchurch  
16 Osborne Street  
Christchurch 8011  
Telephone 03-389 1007  
Facsimile 03-389 1276  
sales@moffat.co.nz

Auckland  
Telephone 09-574 3150  
sales@moffat.co.nz



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Moffat 11.11

