

Technical data sheet for

UD

High Performance Undercounter Dishwasher - 500 Rack

W 600mm x D 640mm x H 840mm



The Washtech UD is a multicycle undercounter machine suited to meeting the demands of busy cafes and small restaurants.

Standard Features

- Now with detergent & rinse fluid injectors fitted standard
- Upper and lower stainless steel arms with removable caps for cleaning
- Flush front design
- Insulated door
- Magnetic door switch
- Ergonomically positioned OneTouch controls
- Robust stainless steel construction
- Electromechanical controls
- Fitted with rear wheels to assist with removal and cleaning (UD & GLV)
- Stainless steel water supply hose provided
- No commissioning required
- Watermark certified
- Low water consumption - 2.6 litres per cycle water consumption
- Up to 800 plates per hour
- Recirculates wash water at nominal 220 litres per minute
- 3kW rinse and 2.5kW wash heating
- Unique OneTouch 1, 2 or 3 minute cycles
- Multiple filtration to ensure effective separation of waste to keep wash water clean
- 350mm wash chamber height clearance
- Drain pump with flexible connection standard
- Suits 500mm international racks
- Fits 650mm bench depth


Accessories

- 2 x 500mm Dish Racks
- 1 x 500mm Cup Rack
- 1 x Cutlery Container



WASHTECH[®]
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech undercounter dishwasher with Watermark certification. The dishwasher shall have OneTouch multi-cycle upper mounted controls with one, two and three minute complete operating cycles. The unit shall be supplied with 500mm cup and dishracks and the wash compartment shall be 350mm tall to accept large plates. The unit shall be fitted with rotating upper and lower all stainless steel separate wash and rinse arms, all with removable end plugs for cleaning. Detergent and rinse fluid injectors shall be fitted, and hot water consumption shall be 2.6 litres per operating cycle. The unit shall require 15 amp single phase electrical supply and be supplied in 100% recyclable shipping packaging.

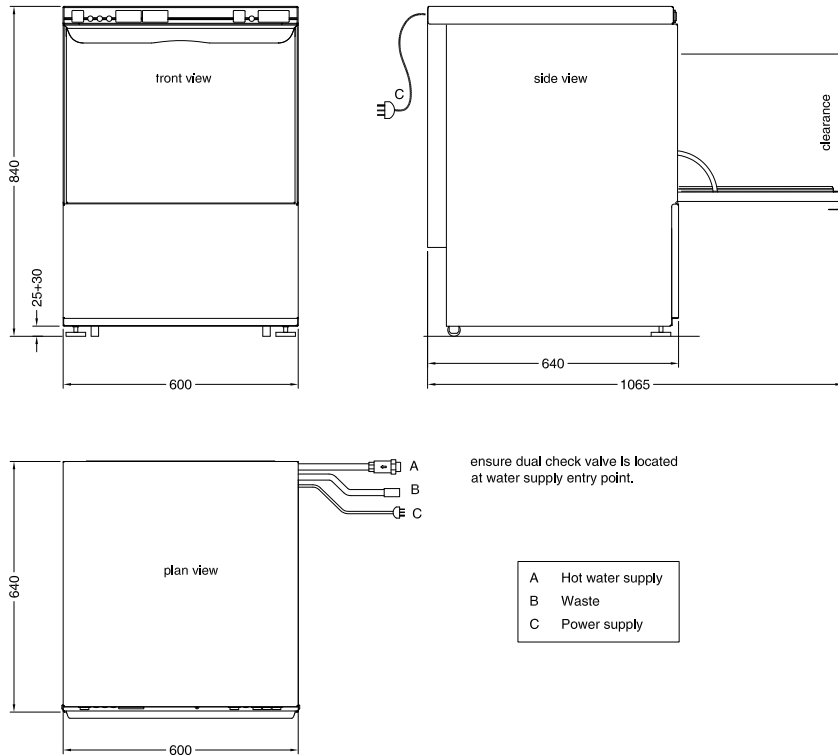

A	Hot Water	temperature connection pressure flow quality	65C 3/4" hose supplied 200-350 kpa 20 litres per min potable & soft
B	Waste	connection	hose supplied
C	Electrical	single phase 240V 50Hz	15 amp

Refer operator manual for complete installation instructions.

Dimensions		Packed Dimensions	
Width	600mm	Width	720mm
Depth	640mm	Depth	690mm
Height	840mm	Height	970mm
Weight	74kg	Weight	92kg
		Cubicmetres	0.50m³



Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



© Copyright Moffat Ltd
Moffat /1175/8.10

