

TECHNICAL DATA SHEET FOR H10T-LMD / H10T-RMD

10 Tray Electric Holding Cabinet TOUCH SCREEN CONTROL

MODEL OPTIONS:

H10T-LMD - Left hand door model

H10T-RMD - Right hand door model

STANDARD FEATURES

- 10 1/1 GN tray capacity
- 74mm tray spacing
- Touch Screen Control
- Individual shelf timers
- Electronic temperature control
- Continuous door seal
- Low velocity circulation fan system
- 4 dia. 76mm castors with 2 front castors with wheel and swivel lock, 2 rigid rear castors
- 100% recyclable packaging



Model H10T-LMD

Model H10T-RMD

H10T-LMD H10T-RMD

Unit shall be a Moffat electrically heated Turbofan Holding Cabinet. The holding cabinet shall have double skin insulated construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 10 half size sheet pans or 10 1/1 GN pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a 5.7" Touch Screen control with individual shelf timers and cabinet temperature control. Holding cabinet shall be mounted on castors, with two rigid castors at rear and two castors, swivel and wheel lock at front. Holding Cabinet shall be fitted with a plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

H10T-LMD / H10T-RMD

10 Tray Holding Cabinet Touch Screen Control

CONSTRUCTION

Double skin insulated construction
304 stainless steel interior cabinet
Stainless steel front, sides and top exterior
Stainless steel interior side racks
Stainless steel frame, side hinged door
5mm thick door glass
Stainless steel control panel
Aluminised coated steel base and rear panels

CONTROLS

5.7" LED backlit touch screen
Individual shelf timers
Temperature range 20 - 90°C

CLEANING

Stainless steel top and side exterior panels
Removable plug-in oven door seal (no tools required)

SPECIFICATIONS

Electrical Requirements

220V-240V, 50Hz, 1+P+N+E, 1.3kW, 5.4A
220V-240V, 60Hz, 1+P+N+E, 1.3kW, 5.4A
Cordset fitted

External Dimensions

Width 610mm
Height 1015mm
Depth 680mm

Nett Weight

75kg

Packing Data

99kg
Width 655mm
Height 1180mm
Depth 830mm
Volume 0.64m³

INSTALLATION CLEARANCES

H10-LMD		H10-RMD	
Rear	50mm	Rear	50mm
LH Side	50mm	LH Side	75mm*
RH Side	75mm*	RH Side	50mm

* For fixed installations a minimum of 500mm is required for service

CLEARANCE FROM OPEN SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

MOFFAT®

Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

www.turbofanoven.com

Australia

Moffat Pty Limited

740 Springvale Road

Mulgrave, Victoria 3170

Telephone 03-9518 3888

Facsimile 03-9518 3833

nsw@moffat.com.au

New Zealand

Moffat Limited

16 Osborne Street

Christchurch 8011

Telephone 03-389 1007

Facsimile 03-389 1276

sales@moffat.co.nz



ISO9001

Quality
Management
Standard


Designed and manufactured by

MOFFAT®


ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

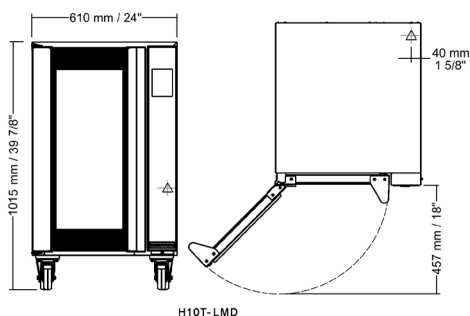

H10T-LMD

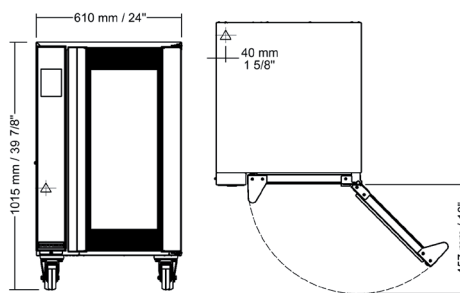

H10T-RMD

